



# CorePro LEDspot LV



# CorePro LED spot 2.3-20W 827 MR11 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with MR16 GU5.3 holders and are designed as a retrofit replacement for halogen or incandescent spots. LEDlamps deliver huge energy savings and minimize maintenance cost.

#### **Product data**

General Information		
Cap base	GU4	
Nominal lifetime	25,000 h	
Switching Cycle	50,000	
Lighting Technology	LED	
Flux measurement reference	Narrow Cone	
Light Technical		
Colour Code	827 [CCT of 2700K]	
Beam angle (nom.)	36 degree(s)	
Luminous Flux	184 lm	
Luminous intensity (nom.)	400 cd	
Luminous efficacy (rated) (nom.)	80.00 lm/W	
Colour designation	Warm White (WW)	
Correlated Colour Temperature	2700 K	
Colour consistency	<6	
Colour rendering index (CRI)	80	
LLMF at end of nominal lifetime (nom.)	70 %	
Luminous flux in 90° cone (rated)	184 lm	
Photobiological safety according to EN 62471 RG1		
Operating and Electrical		
Line Frequency	- Hz	

Input frequency	- Hz
Power Consumption	2.3 W
Lamp current (nom.)	340 mA
Wattage equivalent	20 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (nom.)	ac electronic 12 V
Temperature	
T-Case maximum (nom.)	60 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear
Bulb shape	MR11
Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	3 kWh

Datasheet, 2024, February 16 data subject to change


# CorePro LEDspot LV

EPREL registration number	391909
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Application Conditions	
Can it be used in closed luminaires	No
Product Data	

871869965948600	
65948600	
929002066402	
1	
0.018 kg	
8718699659486	
12	
8718699659493	


Order product name	CorePro LED spot 2.3-20W 827 MR11 36D
Full product name	CorePro LED spot 2.3-20W 827 MR11 36D


## Dimensional drawing



Product	D	С
CorePro LED spot 2.3-20W 827 MR11 36D	35.5 mm	39.5 mm

## Photometric data

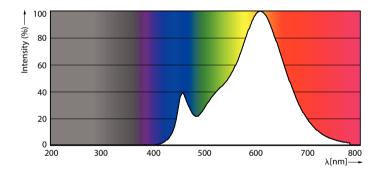




Spectral Power Distribution Colour - CorePro LED spot 2.3-20W 827 MR11 36D

Light Distribution Diagram - CorePro LED spot 2.3-20W 827 MR11 36D

## CorePro LEDspot LV


#### Photometric data




Calculus Phonameurics 4.5 Philips Lighting B.V. Fago: 177

Accent Lighting Spots - CorePro LED spot 2.3-20W 827 MR11 36D

#### Lifetime

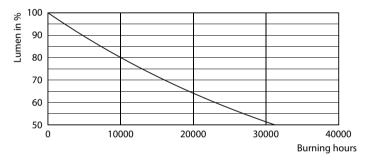

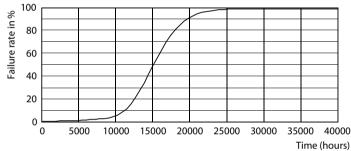

Lumen Maintenance Diagram - CorePro LED spot 2.3-20W 827 MR11 36D

LEDspot Classic MR11 36D 2700K



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.